

Performance

Placement

Walls and ceiling
On garden spike
Direct burial

Maximum Output

100 dB each, with 32 watts of amplification.

90dB Coverage Area

Up to 20' (6.1 m) from speaker

Close-Miked Near-Field Response (-3 dB)

80-20,000 Hz

6 dB Downpoint

68 Hz

Nominal Coverage Angle (-6 dB from Reference Axis)

120° Radial

Sensitivity [1 watt (2.83V) at 1 m]

86 dB

Nominal Impedance

8 ohms (70V version available)

Drive Unit

4" aluminum cone

Connections

Bare wire

Construction

Powder coated aluminum enclosure and grille.

Weight


4 lbs. (1.8 kg)

Mounting Options




Ceiling/Wall Mount Kit (KIT-WCW)

Mounts to wall or ceiling. Provides 360° rotation.




Flush Mount Kit (KIT-FMW)

Mounts flush to wall or ceiling.




Garden Spike (KIT-SPK)

Die-cast aluminum garden spike and swivel mount provide 360° rotation.



Top Hat Kit (KIT-THB)

Metal Top Hat mounts to top of speaker for direct burial applications.



Multi-Mount Adaptor (KIT-MMB)

Multi-Mount adaptor attaches two PS4 satellites. Works with spike, ceiling/wall mount kits.


PARK | STEVENS

8 ohm or 70V Operation

The PS4 is available in 8 ohm and 70V models. The 70V model has 5 taps, from 2-32 watts.

Finishes

Available in powder coated black or white. Speakers are paintable.

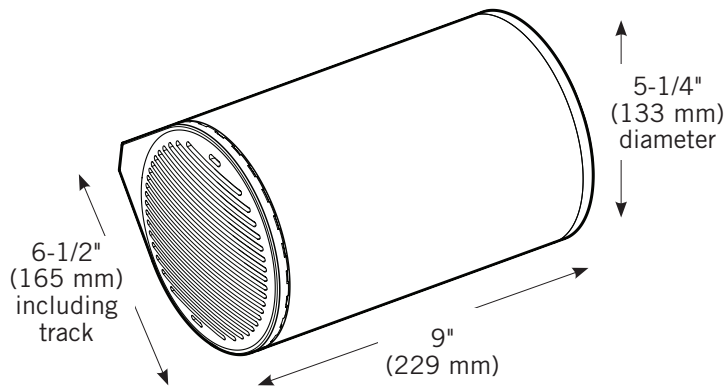

Performance

Placement

Walls and ceiling
On garden spike

Maximum Output

108 dB each, with 32 watts of amplification.

90dB Coverage Area

Up to 30' (9 m) from speaker

Close-Miked Near-Field Response (-3 dB)

80-20,000 Hz

6 dB Downpoint

68 Hz

Nominal Coverage Angle (-6 dB from Reference Axis)

180° Radial

Sensitivity [1 watt (2.83V) at 1 m]

86 dB

Nominal Impedance

4 ohms (70V version available)

Drive Units

Dual 4" aluminum cone

Connections

Bare wire

Construction

Powder coated aluminum enclosure and grille.

Weight


6 lbs. (2.7 kg)

Mounting Options



Ceiling/Wall Mount Kit (KIT-WCW)

Mounts to wall or ceiling. Provides 360° rotation.




Flush Mount Kit (KIT-FMW)

Mounts flush to wall or ceiling.



Garden Spike (KIT-SPK)

Die-cast aluminum garden spike and swivel mount provide 360° rotation.



Multi-Mount Adaptor (KIT-MMB)

Multi-Mount adaptor attaches two PS4 satellites. Works with spike, ceiling/wall mount kits.


PARK | STEVENS

8 ohm or 70V Operation

The PS4-D is available in 8 ohm and 70V models. The 70V model has 5 taps, from 2-32 watts.


Finishes

Available in powder coated black or white. Speakers are paintable.

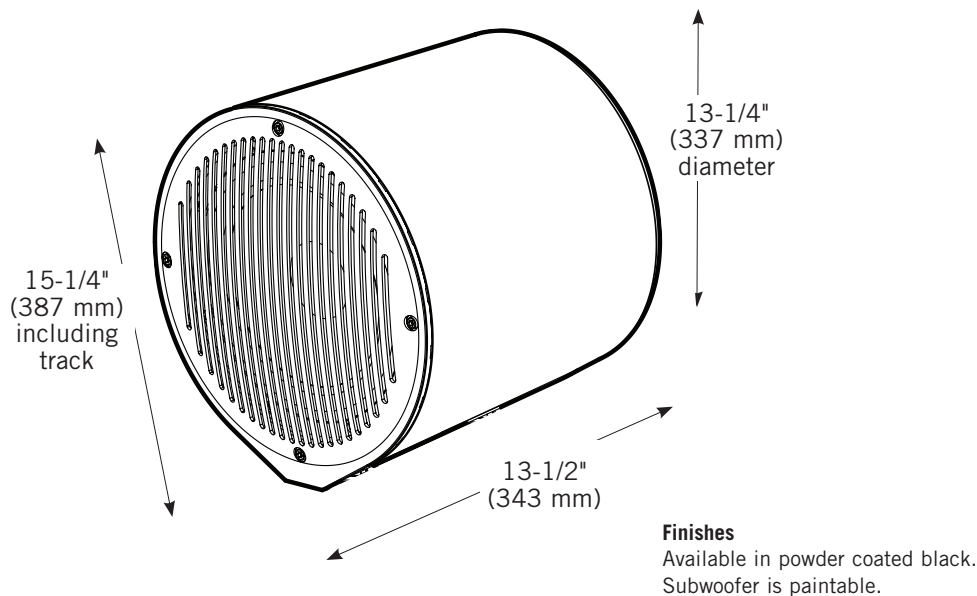


PARK | STEVENS


Mounting Options

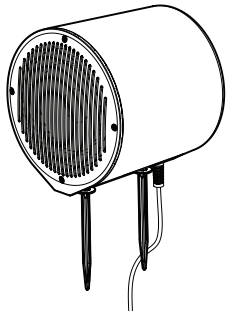

Garden Spike
(KIT-SSP)
Die-cast aluminum garden spikes.



Underdeck Mount Kit
(KIT-UDB)
Straps underneath decking.

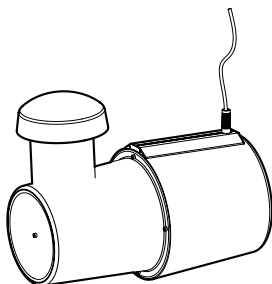


Burial Kit
(KIT-BPB)
Band-pass kit with mushroom cap for direct burial.

Predictive Placement

Coverage

How loud is the subwoofer as distance increases.

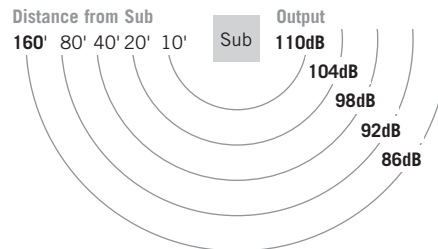

Performance

Placement

Direct burial
Under decking
On garden spike

Maximum Output

116 dB each, with 500 watts of amplification.

90dB Coverage Area

Up to 40' (12 m) from speaker

Close-Miked Near-Field Response (-3 dB)

34-20,000 Hz

6 dB Downpoint

28 Hz

Nominal Impedance

4 ohms

Bass Unit

10" long-throw bass unit, cast basket, 3" high-temperature voice coil.

Connections

Bare wire

Construction

Powder coated aluminum enclosure and grille.

Weight

27 lbs. (12.2 kg)